


X-TREME BSL PRO







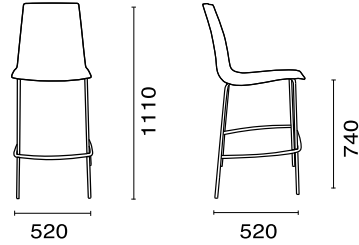













www.papatya.com.tr



PP FINISH



Frame Features (Ø 17 mm - 2 mm thickness)

	106 Chrome plated	
	101 White powder coated	
	102 Black powder coated	
	103 Anthracite powder coated	
	104 Taupe powder coated	
	110 Dark yellow powder coated	
	111 Brick red powder coated	
	112 Reseda Green powder coated	
	113 Brass Plated (vintage/mat)	
	114 Copper Plated (vintage / mat)	

Net weight

Gross weight

Max.Stacking

Packaging

Shipment Details

(kg)
6.28

(kg)
7.31



690x520x1270mm / m³ 0.46



20' : 204 pcs.
40' : 440 pcs.
40HC : 492 pcs.
100cbm: 720 pcs.

Description

A new member of X-Treme range ! Natural, warm, contemporary. The organic softness of the glassfibre polypropylene shell in mat colours offers a new way of looking and feeling. It's a pleasant range where you can relax in perfect harmony. Available in all version of the frames from X-Treme Collection. Anti UV stabilized. Designed with public spaces in mind and suitable both for home and contract usages.

Auxiliary Materials

4 pcs. gliders in polyurethane - 2 pcs. star supporting part - 1 pcs. star supporting drop label - 4 pcs (M6x28) montage bolt - 4 pcs. montage gasket - 4 pcs. montage anchor - 4 pcs.(M6) montage flake.

Cleaning & Maintenance

Should be cleaned with detergent and a soft damp cloth. Should not be cleaned with abrasive chemicals.
No periodic maintenance required.

Product Quality Certificate



TSE 581-1 / 581-2 / 581-3



ISO 9001
Quality Management System



ISO 45001
Occupational Health and Safety
Management System



ISO 14001
Environmental
Management System