


X-TREME S SLED PRO

www.papatya.com.tr



PP FINISH

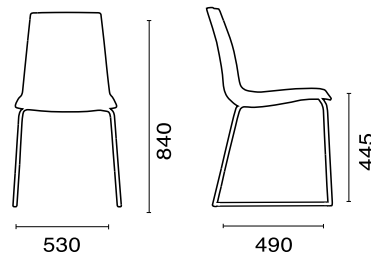

Frame Features (Ø 13 mm - 2 mm thickness)

	101 White powder coated	
	102 Black powder coated	
	103 Anthracite powder coated	
	104 Taupe powder coated	
	110 Dark yellow powder coated	
	111 Brick red powder coated	
	112 Reseda Green powder coated	
	117 Wenge powder coated	
	118 Warm Grey powder coated	
	123 Aqua Blue powder coated	
	113 Brass Plated (vintage/mat)	
	114 Copper Plated (vintage / mat)	

Net weight

Gross weight

Max.Stacking

Packaging

Shipment Details

(kg)
4.87

(kg)
5.72



520x650x1000mm / m³ 0.34



20' : 320 pcs.
40' : 656 pcs.
40HC : 848 pcs.
100cbm: 952 pcs.

Description

A new member of X-Treme range ! Natural, warm, contemporary. The organic softness of the glassfibre polypropylene shell in mat colours offers a new way of looking and feeling. It's a pleasant range where you can relax in perfect harmony. Available in all version of the frames from X-Treme Collection. Anti UV stabilized. Designed with public spaces in mind and suitable both for home and contract usages.

Auxiliary Materials

4 pcs. gliders in polyurethane - 2 pcs. star supporting part - 1 pcs. star supporting drop label - 4 pcs (M6x28) montage bolt - 4 pcs. montage gasket - 4 pcs. montage anchor - 4 pcs.(M6) montage flake.

Cleaning & Maintenance

Should be cleaned with detergent and a soft damp cloth. Should not be cleaned with abrasive chemicals.
No periodic maintenance required.

Product Quality Certificate

